

Application areas

Single point supply:

- > Kitchen sink
- > Washbasin








	÷ ::
Energy efficiency class 🗛	S5-U (undersink model)
Part number:	4100-42052
Content [litres]:	5
Type:	vented
Water connections (thread connections):	G 3/8"
Temperature range [°C]:	approx. 35 – 85
approx. mixed water amount 40 °C at 65 °C ¹⁾ [litres]:	9.1
Nominal power rating (kW):	2.0
Supply voltage [V]:	1~/N/PE 230 V AC
Heating time $\Delta t = 55 \text{K}^{2)}$ [min]:	10
Standby power consumption at 65 °C [kWh / 24h]:	0.27
Internal tank:	plastic
Function indicator:	✓
Temperature limit adjustable to [°C]:	38 / 55 / 65
Protection class:	IP24
Dimensions (height × width × depth) [cm]:	37.6 × 25.6 × 22.8
Power cable:	with plug
approx. weight filled with water [kg]:	8.5

¹⁾ At an inlet temperature of 12 °C $\,$ 2) Temperature increase e.g. from 10 °C to 65 °C $\,$

Description

- > Vented 5-litre storage water heater (undersink model) for hot water supply at a single point-of-use
- > Temperature control approx. $35\,^\circ\text{C}$ bis $85\,^\circ\text{C}$ with available energy-saver range and optional temperature limitation at $38\,^\circ\text{C}$, $55\,^\circ\text{C}$ or $65\,^\circ\text{C}$
- > Can only be used with a special open-outlet tap for vented hot water heaters
- > Safety temperature limiter as dry-run protection
- > Internal tank of polypropylene with recyclable, thermal insulation
- $\,>\,$ High-quality insulation keeps heat losses at a minimum
- > Automatic frost protection
- > Power cable with plug, length: ≤ 65 cm



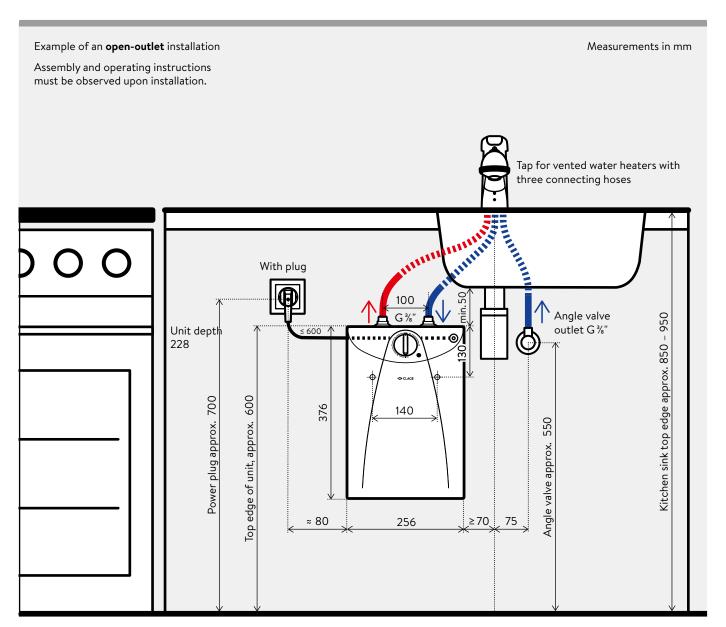



Accessories





EKA (optional)

Single-lever mixer tap with pull-out rinse sprayer, outlet 20 \mbox{cm}

EKA: Part no. 1100-04230



SNT (optional)

Two-handle temperature control mixer tap with swivel spout 15 cm

SNT: Part no. 4100-0210



Aerators (optional)

Aerator insert for tap adapter M 22/24 at the tap

CSS: Part no. 0010-00504

Aerator with chrome tap adapter M 22i (suitable for taps with male threads at the outlet)

CSSi: Part no. 89125